


GVI

GLOBAL VISION INC

GVI Fire Pump Test Meters

The industry leader in flow meters

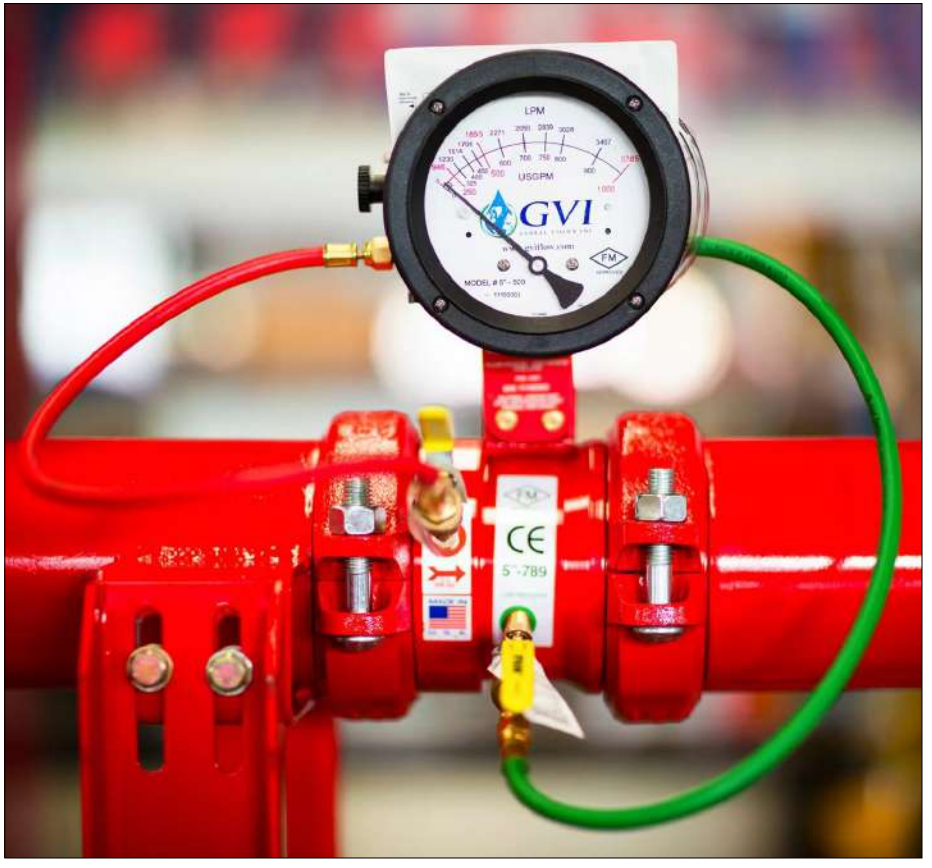

FM APPROVED

Global Vision Inc 8730 Jefferson Highway
Osseo, Minnesota 55369 USA tel: 763-391-0990 fax: 763-391-7668
Www.gviflow.com info@gviflow.com

Made In the U.S.A.

Why choose GVI?

- FM Approved flow meters
- Patented accuracy of 0.5%
- Friction loss less than 1 psi
- Full 5 Year Warranty
- FM Approved Digital and Glycerin gauges
- Substantial inventory for quick shipping

With continuous improvements and cutting edge technology, GVI has just released our most accurate flow meter ever.

This is why GVI is the most requested and most specified fire meter in the world.

The GVI gauge is used in more fire training centers worldwide than all flow test meter competitors combined.

After using GVI flow meter for the first time, you will understand why we are number 1.



Accuflow Venturi

Patent

#D764,630S







Customized and special projects

FM Approved Glycerin Gauge



Adding glycerin reduces the harmonic vibrations that transmit to the needle during a flow test.

These vibrations can make it difficult to read the needle, and also creates stress on the internal components and gears.

<u>The GVI glycerin meter delivers</u>:

- Superior accuracy
- consistent no bounce readings
- Less internal damage / stress
- longer lifespan
- greater reliability

Non-toxic, Non-hazardous
Worldwide shipping available

FM APPROVED

You've Never Run a Pump Test Like This

Digital 4-20ma transmitter options

Capturing data from a flow test has never been easier. With the growth in building maintenance software and connectivity, GVI digital is the perfect option.



Being able to transmit the 4-20 ma signal from a flow test is the key.

⇒ Connect the digital directly to a fire pump controller to view the flow displayed on the panel.

⇒ Or connect to a compatible building maintenance software and not only capture the data, but view from a remote location.



GVI Full Digital

- Backlit display
- Reverse polarity protection
- Display: GPM / LPM / m3H
- Power: 12-32 VDC
- Optional Battery pack



GVI Hybrid Digital

- Glycerin filled analog dial
- No bounce needle
- 4-20 ma transmitter

FM APPROVED

Production

GVI produces all venturis from domestic U.S. thick wall tube. This heavy duty steel ensures our venturi will be around years longer than the thinner, lightweight alternatives.



CNC Machines

With 3 CNC lathes & a new Swiss machine at GVI, lead times are in days, not weeks or months, and quality control Is guaranteed.





Robotic Welding

GVI has added robotic welders to our production line. Not only does this decrease lead times, it also ensures flanged units have the perfect weld every time.



Testing



With tolerances of .005 the results are a perfect venturi every time



After machining, every venturi is inspected with ISO certified test equipment



NIST METER TESTING

Every GVI gauge undergoes advanced computerized testing before leaving the factory. These tests include leakage, calibration, and accuracy tests.

Upon successful testing the gauge is issued an NIST certificate tied specifically to the serial number on the dial face.

The certification is stored in a plastic pouch connected to the gauge. This pouch also illustrates the typical installation and the operating instructions for the fire pump flow test.

Contact your GVI rep for duplicate sheets or updated certifications.

Standard Model List

Line Size	Pump GPM	Meter Range Min-Max GPM	Model Number Grooved	Model Number Butt Weld	Model Number 150# Flanged	Model Number 300# FLANGED
2”	50	25 – 100	2”-50-G	2”-50-B	2”-50-F	2”-50-T
2-1/2”	100	50 - 200	2.5”-100-G	2.5”-100-B	2.5”-100-F	2.5”-100-F3
3”	150	75 – 300	3”-150-G	3”-150-B	3”-150-F	3”-150-F3
3”	200	100 – 400	3”-200-G	3”-200-B	3”-200-F	3”-200-F3
4”	250	125 – 500	4”-250-G	4”-250-B	4”-250-F	4”-250-F3
4”	300	150 – 600	4”-300-G	4”-300-B	4”-300-F	4”-300-F3
4”	400	200 – 800	4”-400-G	4”-400-B	4”-400-F	4”-400-F3
4”	450	225 – 900	4”-450-G	4”-450-B	4”-450-F	4”-450-F3
5”	450	225 – 900	5”-450-G	5”-450-B	5”-450-F	5”-450-F3
5”	500	250 – 1000	5”-500-G	5”-500-B	5”-500-F	5”-500-F3
5”	750	375 – 1500	5”-750-G	5”-750-B	5”-750-F	5”-750-F3
6”	500	250 – 1000	6”-500-G	6”-500-B	6”-500-F	6”-500-F3
6”	750	375 – 1500	6”-750-G	6”-750-B	6”-750-F	6”-750-F3
6”	1000	500 – 2000	6”-1000-G	6”-1000-B	6”-1000-F	6”-1000-F3
6”	1250	625- 2500	6”-1250-G	6”-1250-B	6”-1250-F	6”-1250-F3

Line Size	Pump GPM	Meter Range Min-Max GPM	Model Number Grooved	Model Number Butt Weld	Model Number 150# Flanged	Model Number 300# FLANGED
8”	1000	500 – 2000	8”-1000-G	8”-1000-B	8”-1000-F	8”-1000-F3
8”	1250	625 – 2500	8”-1250-G	8”-1250-B	8”-1250-F	8”-1250-F3
8”	1500	750 – 3000	8”-1500-G	8”-1500-B	8”-1500-F	8”-1500-F3
8”	2000	1000 – 4000	8”-2000-G	8”-2000-B	8”-2000-F	8”-2000-F3
8”	2500	1250 – 5000	8”-2500-G	8”-2500-B	8”-2500-F	8”-2500-F3
8”	3000	1500 – 6000	8”-3000-G	8”-3000-B	8”-3000-F	8”-3000-F3
10”	1500	750 – 3000	10”-1500-G	10”-1500-B	10”-1500-F	10”-1500-F3
10”	2000	1000 – 4000	10”-2000-G	10”-2000-B	10”-2000-F	10”-2000-F3
10”	2500	1250 – 5000	10”-2500-G	10”-2500-B	10”-2500-F	10”-2500-F3
10”	3000	1500 – 6000	10”-3000-G	10”-3000-B	10”-3000-F	10”-3000-F3
10”	3500	1750 – 7000	10”-3500-G	10”-3500-B	10”-3500-F	10”-3500-F3
10”	4000	2000 – 8000	10”-4000-G	10”-4000-B	10”-4000-F	10”-4000-F3
10”	4500	2250 – 9000	10”-4500-G	10”-4500-B	10”-4500-F	10”-4500-F3
12”	2000	1000 – 4000	12”-2000-G	12”-2000-B	12”-2000-F	12”-2000-F3
12”	2500	1250– 5000	12”-2500-G	12”-2500-B	12”-2500-F	12”-2500-F3
12”	3000	1500 – 6000	12”-3000-G	12”-3000-B	12”-3000-F	12-“3000-F3
12”	3500	1750 – 7000	12”-3500-G	12”-3500-B	12”-3500-F	12”-3500-F3
12”	4000	2000 – 8000	12”-4000-G	12”-4000-B	12”-4000-F	12”-4000-F3
12”	4500	2250 - 9000	12”-4500-G	12”-4500-B	12”-4500-F	12”-4500-F3
12”	5000	2500 - 10000	12”-5000-G	12”-5000-B	12”-5000-F	12”-5000-F3

1026 Carbon Steel

316 stainless

Duplex S.S.

Super Duplex

Monel

NiAlumBrz

90-10 Cu-Ni

Aluminum


Brass

Epoxy

CONSTRUCTION & SPECIFICATIONS


MATERIALS:	1026 MACHINED CARBON STEEL
VALVES:	1/4" BRASS BALL
FLANGE OPT:	150# ANSI B 16.5 300# ANSI B 16.5
ID TAG:	ALUMINUM

METER DATA




CONSTRUCTION:	ALUMINUM BODY
OPERATION:	DIAPHRAGM (BUNA CONVOLUTED)
TEMPERATURE:	180°F / 80°C
PRESSURE:	500 PSIG - 3450 KPA
APPROX. WEIGHT:	3.75 LBS (1.7 KGS)


4" DIAL STANDARD - 6" DIAL AVAILABLE




BUTT WELD / GROOVED



BUTT WELD



GROOVED



FLANGED

SIZE	BUTT WELD & GROOVED		150 # FLANGED		300# FLANGED	
	"A" DIM	APPROX. WEIGHT	"A" DIM	APPROX. WEIGHT	"A" DIM	APPROX. WEIGHT
1-1/4"	4.875	10 lbs.	———	———	———	———
2"	5.000	11 lbs.		25 lbs.	———	———
2-1/2"	4.000	11 lbs.	9.250	25 lbs.	10.000	35 lbs.
3"	4.000	13 lbs.	9.375	40 lbs.	10.250	50 lbs.
4"	5.375	15 lbs.	11.375	50 lbs.	12.125	65 lbs.
5"	6.000	20 lbs.	13.000	60 lbs.	13.750	80 lbs.
6"	7.000	25 lbs.	14.000	75 lbs.	14.750	115 lbs.
8"	7.250	35 lbs.	15.250	120 lbs.	16.000	175 lbs.
10"	8.000	60 lbs.	16.000	170 lbs.	17.250	225 lbs.
12"	10.000	65 lbs.	19.000	225 lbs.	20.250	345 lbs.

Replacement Hoses



Replacement Hoses with Full Brass Fittings

GREEN HOSE		RED HOSE	
24-FPH-F-GRN	2' Green fire pump hose with brass fittings	24-FPH-F-RED	2' Red fire pump hose with brass fittings
36-FPH-F-GRN	3' Green fire pump hose with brass fittings	36-FPH-F-RED	3' Red fire pump hose with brass fittings
60-FPH-F-GRN	5' Green fire pump hose with brass fittings	60-FPH-F-RED	5' Red fire pump hose with brass fittings
120-FPH-F-GRN	10' Green fire pump hose with brass fittings	120-FPH-F-RED	10' Red fire pump hose with brass fittings
180-FPH-F-GRN	15' Green fire pump hose with brass fittings	180-FPH-F-RED	15' Red fire pump hose with brass fittings



Replacement Hoses WITHOUT Brass Fittings


GREEN HOSE		RED HOSE	
24-FPH-GRN	2' Green fire pump hose only	24-FPH-RED	2' Red fire pump hose only
36-FPH-GRN	3' Green fire pump hose only	36-FPH-RED	3' Red fire pump hose only
60-FPH-GRN	5' Green fire pump hose only	60-FPH-RED	5' Red fire pump hose only
120-FPH-GRN	10' Green fire pump hose only	120-FPH-RED	10' Red fire pump hose only
180-FPH-GRN	15' Green fire pump hose only	180-FPH-RED	15' Red fire pump hose only



Brass Fitting Assembly

BFA1 - Single assembly
BFA2 - Brass fitting pair

GVI Spooling Pieces

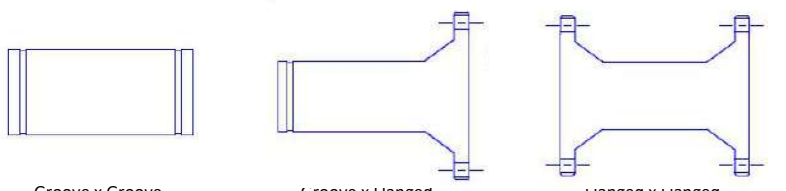

Flow meter accessories



Standard Dry
Analog gauge



Glycerin filled
Analog gauge



Hard storage case



Full Digital gauge
Local Display & 4-20 ma
transmitter



GVI Hybrid Digital
Glycerin filled dial
4-20 ma transmitter



Digital battery pack

Contact your GVI representative for additional information on replacement parts and accessories.



Flow Meter Flush kit



Protective Cover



Bleeder valves



ENGRAVED I.D. tag



Auto air vent




Clear bleed hose

Installation / Operation

1. Close the system valve
2. Open the by-pass valve and throttle valve
3. Purge air from meter as follows:


   - Open Ball valve on red and green hoses
   - Open the high side bleeder knob until a steady stream of water is coming from the Clear hose
   - Close high pressure bleeder knob
   - Repeat for low pressure side
   - Ensure both bleeder knobs are closed

4. Start fire pump, read meter in gpm/lpm/m3h
5. Refer to pump requirements and adjust throttle valve for this requirement
6. After test, open system valve and close the by-pass and throttle valves

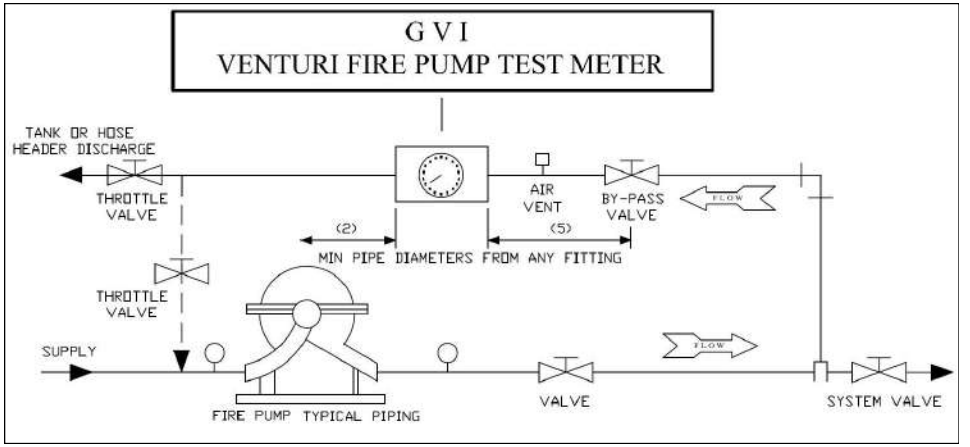


Typical flow loop configuration

Can be installed vertically or horizontally

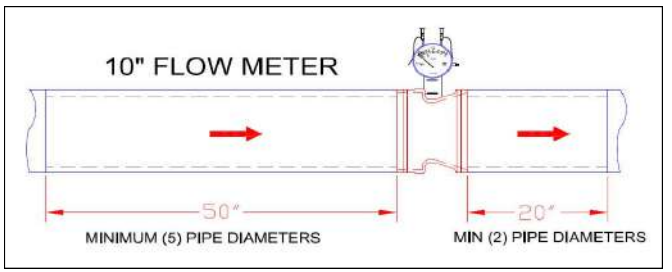


Typ. Install with 5/2 pipe diameters.
Clear of obstructions, valves, or bends.

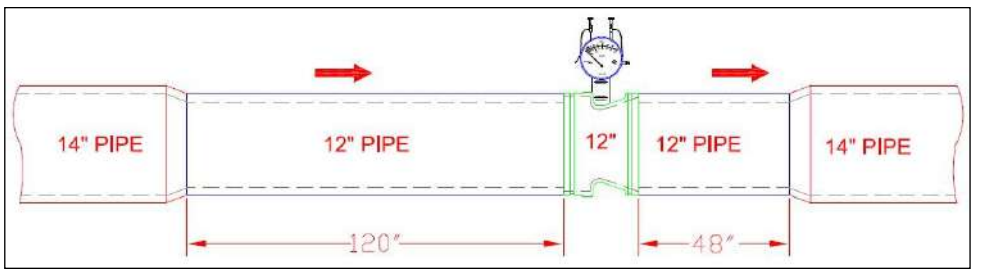

If reducers are used, lengthen the min pipe dia.
To 10/4 to ensure accuracy is maintained.

Preventative Maintenance

Flow Meter Flush Kit

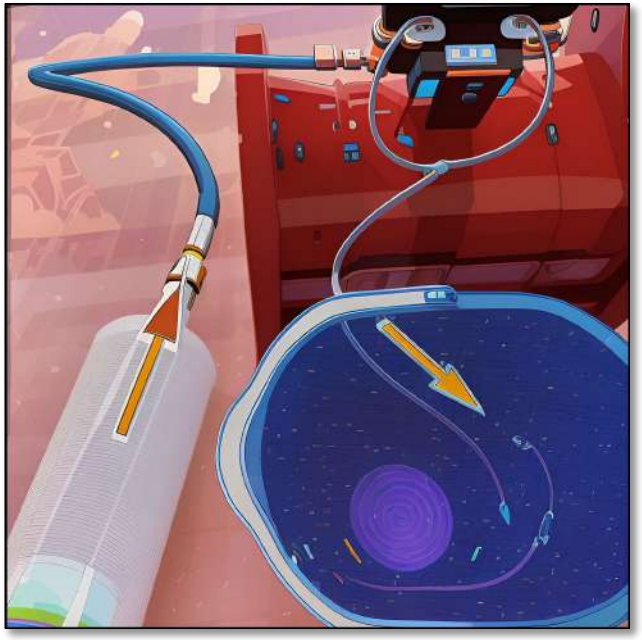

Flushing the GVI flow meter with clean water after every flow test is an essential P/M. Removing any debris or buildup will ensure the gauge stays in perfect working condition.

Protective Gauge Cover



Keep your gauge protected when not in use. The GVI cover will help insulate against hot or cold environments, while preventing sand, dust, or the sun from causing gauge damage.



INSTRUCTIONS

GVIFLOW.COM

Global Vision Inc 8730 Jefferson Highway
Osseo, Minnesota 55369 USA tel: 763-391-0990
Www.gviflow.com info@gviflow.com