Grooved Products | Grooved Fittings | Flange Adapter PN16 - Threaded | VK-FTP



SPECIFICATIONS	
Sizes (Nominal)	2" to 4" NPT DN50 to DN100 BSP
Approvals*	UL FM APPROVED
Working pressure	20.7 bar (300 psi)
Material	Ductile cast iron, ASTM A536 Grade 65-45-12
Finish	• Painted red** • Galvanised
Application	Water based fire-suppression systems
Installation	Refer to "Installation Manual"
Maintenance	Visual check

* Refer to table below for full approval listings
** Red epoxy available on request

Part numbers & technical data | VK-FTP

Nominal size		Pipe OD (mm)	Thread size	Thread type	Part number		Approvals		Max. working pressure (psi / bar)	
Inch	DN				Painted red	Galvanised	UL	FM	UL	FM
NPT										
2	50	60.3	2"	NPT	VK-FTP-060NP	VK-FTP-060NG	▪	▪	300 / 20.7	300 / 20.7
3OD	65	76.1	2-1/2"	NPT	VK-FTP-076NP	VK-FTP-076NG	▪	▪	300 / 20.7	300 / 20.7
3	80	88.9	3"	NPT	VK-FTP-089NP	VK-FTP-089NG	▪	▪	300 / 20.7	300 / 20.7
4	100	114.3	4"	NPT	VK-FTP-114NP	VK-FTP-114NG	▪	▪	300 / 20.7	300 / 20.7
BSP										
2	50	60.3	DN50	BSP	VK-FTP-060BP	VK-FTP-060BG	▪	▪	300 / 20.7	300 / 20.7
3OD	65	76.1	DN65	BSP	VK-FTP-076BP	VK-FTP-076BG	▪	▪	300 / 20.7	300 / 20.7
3	80	88.9	DN80	BSP	VK-FTP-089BP	VK-FTP-089BG	▪	▪	300 / 20.7	300 / 20.7
4	100	114.3	DN100	BSP	VK-FTP-114BP	VK-FTP-114BG	▪	▪	300 / 20.7	300 / 20.7


Note: This document contains basic product information only. Information, photos and drawings are not contractually binding. In all cases, the manufacturer's full technical documentation remains the reference document. Note that certificates, test reports and approvals may be published in the OEM name.
The contents of this publication are subject to modifications without notice. All rights reserved.
Fireking™ is a trademark of The Viking Corporation.

Trusted above all.

Viking S.A. *(ed.)* | 21, Z.I. Haneboesch | L-4562 Differdange/Niederkorn | Luxembourg | vikinglux@viking-emea.com | www.viking-emea.com

Grooved Products | Grooved Fittings | Flange Adapter PN16 - Threaded | VK-FTP

Dimensional drawing

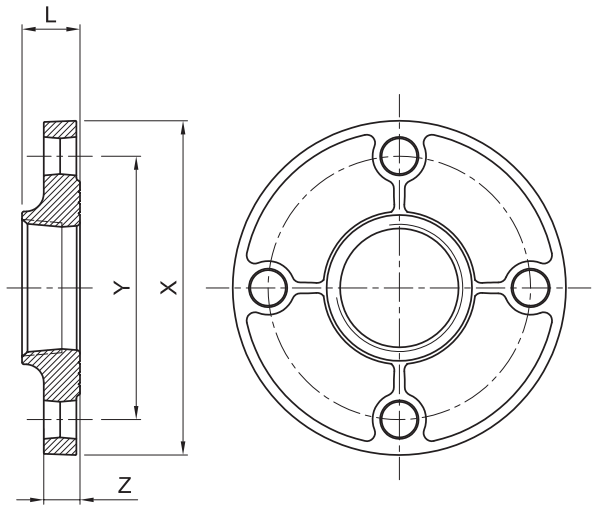

Dimensions | VK-FTP

Inch	DN	Pipe OD (mm)	L (mm)	X (mm)	Y (mm)	Z (mm)	Bolts-Nuts	Weight (kg)
2	50	60.3	32	165	125	19	4 x M16	1.6
3OD	65	76.1	32	185	145	19	4 x M16	2.1
3	80	88.9	34	200	160	19	8 x M16	2.4
4	100	114.3	40	220	180	19	8 x M16	3.6

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding. In all cases, the manufacturer's full technical documentation remains the reference document. Note that certificates, test reports and approvals may be published in the OEM name.
The contents of this publication are subject to modifications without notice. All rights reserved.
Fireking™ is a trademark of The Viking Corporation.

Viking S.A. *(ed.)* | 21, Z.I. Haneboesch | L-4562 Differdange/Niederkorn | Luxembourg | vikinglux@viking-emea.com | www.viking-emea.com