
Grooved Products | Grooved Fittings | Adapter Nipple | VK-AN

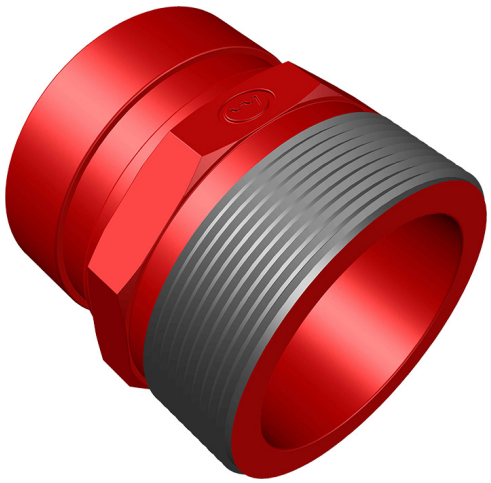


SPECIFICATIONS	
Sizes (Nominal)	1-1/2" and 2" NPT DN40 and DN50 BSP
Approvals*	UL FM APPROVED
Working pressure	34.5 bar (500 psi)
Material	Ductile cast iron, ASTM A536 Grade 65-45-12
Finish	Painted red**
Application	Water based fire-suppression systems
Installation	Refer to "Installation Manual"
Maintenance	Visual check

* Refer to table below for full approval listings
** Red epoxy available on request

Part numbers & technical data | VK-AN

Nominal size		Pipe OD mm	Thread size	Thread type	Part number	Approvals		Max. working pressure (psi / bar)	
Inch	DN					UL	FM	UL	FM
NPT									
1-1/2	40	48.3	1-1/2"	NPT	VK-AN-048NP	▪	▪	500 / 34.5	500 / 34.5
2	50	60.3	2"	NPT	VK-AN-060NP	▪	▪	500 / 34.5	500 / 34.5
BSP									
1-1/2	40	48.3	DN40	BSP	VK-AN-048BP	▪	▪	500 / 34.5	500 / 34.5
2	50	60.3	DN50	BSP	VK-AN-060BP	▪	▪	500 / 34.5	500 / 34.5

Dimensional drawing

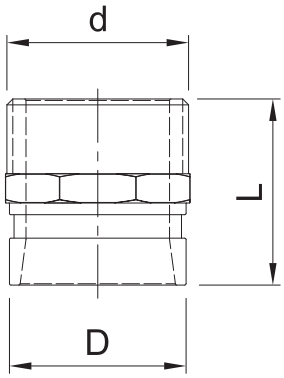

Dimensions | VK-AN

Inch (D x d)	DN (D x d)	Pipe OD (mm)	L (mm)	Weight (kg)
1-1/2 x 1-1/2	40 x 40	48.3 x 48.3	63	0.4
2 x 2	50 x 50	60.3 x 60.3	63	0.4

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding. In all cases, the manufacturer's full technical documentation remains the reference document. Note that certificates, test reports and approvals may be published in the OEM name.
The contents of this publication are subject to modifications without notice. All rights reserved.
Fireking™ is a trademark of The Viking Corporation.

Trusted above all.

Viking S.A. *(ed.)* | 21, Z.I. Haneboesch | L-4562 Differdange/Niederkorn | Luxembourg | vikinglux@viking-emea.com | www.viking-emea.com