
FIREKING

Grooved Products | Grooved Fittings | Adapter Nipple - Reducing | VK-ANR

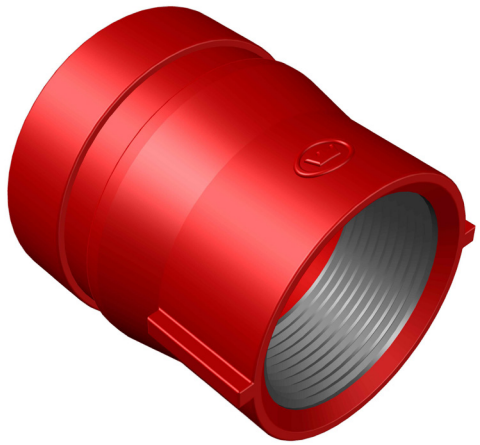


SPECIFICATIONS	
Sizes (Nominal)	1-1/2" x 1" and 2" x 1-1/2" NPT DN40 x DN25 and DN50 x DN40 BSP
Approvals*	UL FM APPROVED
Working pressure	34.5 bar (500 psi)
Material	Ductile cast iron, ASTM A536 Grade 65-45-12
Finish	Painted red**
Application	Water based fire-suppression systems
Installation	Refer to "Installation Manual"
Maintenance	Visual check

* Refer to table below for full approval listings
** Red epoxy available on request

Part numbers & technical data | VK-ANR

Nominal size		Pipe OD (mm)	Thread size	Thread type	Part number	Approvals		Max. working pressure (psi / bar)	
Inch	DN					UL	FM	UL	FM
NPT									
1-1/2 x 1	40 x 25	48.3 x 33.7	1"	NPT	VK-ANR-04825NP	▪	▪	500 / 34.5	500 / 34.5
2 x 1-1/2	50 x 40	60.3 x 48.3	1-1/2"	NPT	VK-ANR-06040NP	▪	▪	500 / 34.5	500 / 34.5
BSP									
1-1/2 x 1	40 x 25	48.3 x 33.7	DN25	BSP	VK-ANR-04825BP	▪	▪	500 / 34.5	500 / 34.5
2 x 1-1/2	50 x 40	60.3 x 48.3	DN40	BSP	VK-ANR-06040BP	▪	▪	500 / 34.5	500 / 34.5

Dimensional drawing

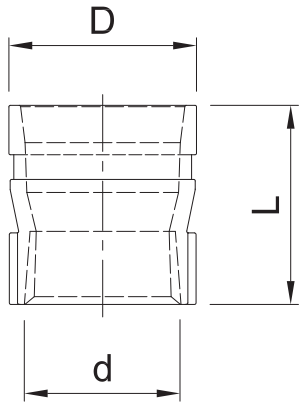

Dimensions | VK-ANR

Inch (D x d)	DN (D x d)	Pipe OD (mm)	L (mm)	Weight (kg)
1-1/2 x 1	40 x 25	48.3 x 33.7	63	0.3
2 x 1-1/2	50 x 40	60.3 x 48.3	63	0.4

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding. In all cases, the manufacturer's full technical documentation remains the reference document. Note that certificates, test reports and approvals may be published in the OEM name.
The contents of this publication are subject to modifications without notice. All rights reserved.
Fireking™ is a trademark of The Viking Corporation.

Trusted above all.

Viking S.A. *(ed.)* | 21, Z.I. Haneboesch | L-4562 Differdange/Niederkorn | Luxembourg | vikinglux@viking-emea.com | www.viking-emea.com