Grooved Products | Grooved Fittings | Concentric Reducer - Threaded | VK-CRT



SPECIFICATIONS

Sizes (Nominal)	1-1/2" x 1" to 8" x 4" NPT DN40 x DN25 to DN200 x DN100 BSP
Approvals*	UL, FM APPROVED
Working pressure	16 bar (232 psi) to 34.5 bar (500 psi) (depending on size and approval)
Material	Ductile cast iron, ASTM A536 Grade 65-45-12
Finish	• Painted red** • Galvanised
Application	Water based fire-suppression systems
Installation	Refer to "Installation Manual"
Maintenance	Visual check

* Refer to table below for full approval listings
** Red epoxy available on request

Part numbers & technical data | VK-CRT | NPT

Nominal size		Pipe OD (mm)	Thread size	Thread type	Part number		Approvals		Max. working pressure (psi / bar)	
Inch	DN				Painted red	Galvanised	UL	FM	UL	FM
1-1/2 x 1	40 x 25	48.3 x 33.7	1"	NPT	VK-CRT-048034NP	VK-CRT-048034NG	▪	-	232 / 16.0	-
2 x 1	50 x 25	60.3 x 33.7	1"	NPT	VK-CRT-060034NP	VK-CRT-060034NG	▪	▪	300 / 20.7	500 / 34.5
2 x 1-1/4	50 x 32	60.3 x 42.4	1-1/4"	NPT	VK-CRT-060042NP	VK-CRT-060042NG	▪	▪	300 / 20.7	500 / 34.5
2 x 1-1/2	50 x 40	60.3 x 48.3	1-1/2"	NPT	VK-CRT-060048NP	VK-CRT-060048NG	▪	▪	300 / 20.7	500 / 34.5
2-1/2 x 1	65 x 25	73.0 x 33.7	1"	NPT	VK-CRT-073034NP	VK-CRT-073034NG	▪	▪	400 / 27.6	400 / 27.6
2-1/2 x 1-1/4	65 x 32	73.0 x 42.4	1-1/4"	NPT	VK-CRT-073042NP	VK-CRT-073042NG	▪	▪	400 / 27.6	400 / 27.6
2-1/2 x 1-1/2	65 x 40	73.0 x 48.3	1-1/2"	NPT	VK-CRT-073048NP	VK-CRT-073048NG	▪	▪	400 / 27.6	400 / 27.6
2-1/2 x 2	65 x 50	73.0 x 60.3	2"	NPT	VK-CRT-073060NP	VK-CRT-073060NG	▪	▪	400 / 27.6	400 / 27.6
3OD x 1	65 x 25	76.1 x 33.7	1"	NPT	VK-CRT-076034NP	VK-CRT-076034NG	▪	▪	300 / 20.7	500 / 34.5
3OD x 1-1/4	65 x 32	76.1 x 42.4	1-1/4"	NPT	VK-CRT-076042NP	VK-CRT-076042NG	▪	▪	300 / 20.7	500 / 34.5
3OD x 1-1/2	65 x 40	76.1 x 48.3	1-1/2"	NPT	VK-CRT-076048NP	VK-CRT-076048NG	▪	▪	300 / 20.7	500 / 34.5
3OD x 2	65 x 50	76.1 x 60.3	2"	NPT	VK-CRT-076060NP	VK-CRT-076060NG	▪	▪	300 / 20.7	500 / 34.5
3 x 1	80 x 25	88.9 x 33.7	1"	NPT	VK-CRT-089034NP	VK-CRT-089034NG	▪	▪	300 / 20.7	500 / 34.5
3 x 1-1/4	80 x 32	88.9 x 42.4	1-1/4"	NPT	VK-CRT-089042NP	VK-CRT-089042NG	▪	▪	300 / 20.7	500 / 34.5
3 x 1-1/2	80 x 40	88.9 x 48.3	1-1/2"	NPT	VK-CRT-089048NP	VK-CRT-089048NG	▪	▪	300 / 20.7	500 / 34.5
3 x 2	80 x 50	88.9 x 60.3	2"	NPT	VK-CRT-089060NP	VK-CRT-089060NG	▪	▪	300 / 20.7	500 / 34.5
3 x 3OD	80 x 65	88.9 x 76.1	2-1/2"	NPT	VK-CRT-089076NP	VK-CRT-089076NG	▪	-	232 / 16.0	-
4 x 1	100 x 25	114.3 x 33.7	1"	NPT	VK-CRT-114034NP	VK-CRT-114034NG	▪	▪	300 / 20.7	500 / 34.5
4 x 1-1/4	100 x 32	114.3 x 42.4	1-1/4"	NPT	VK-CRT-114042NP	VK-CRT-114042NG	▪	▪	300 / 20.7	500 / 34.5
4 x 1-1/2	100 x 40	114.3 x 48.3	1-1/2"	NPT	VK-CRT-114048NP	VK-CRT-114048NG	▪	▪	300 / 20.7	500 / 34.5
4 x 2	100 x 50	114.3 x 60.3	2"	NPT	VK-CRT-114060NP	VK-CRT-114060NG	▪	▪	300 / 20.7	500 / 34.5
4 x 3OD	100 x 65	114.3 x 76.1	2-1/2"	NPT	VK-CRT-114076NP	VK-CRT-114076NG	▪	▪	300 / 20.7	500 / 34.5
4 x 3	100 x 80	114.3 x 88.9	3"	NPT	VK-CRT-114089NP	VK-CRT-114089NG	▪	▪	300 / 20.7	500 / 34.5

Table continued on next page

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding. In all cases, the manufacturer's full technical documentation remains the reference document. Note that certificates, test reports and approvals may be published in the OEM name.
The contents of this publication are subject to modifications without notice. All rights reserved.
Fireking™ is a trademark of The Viking Corporation.

Trusted above all.

Viking S.A. *(ed.)* | 21, Z.I. Haneboesch | L-4562 Differdange/Niederkorn | Luxembourg | vikinglux@viking-emea.com | www.viking-emea.com

Grooved Products | Grooved Fittings | Concentric Reducer - Threaded | VK-CRT

Part numbers & technical data | VK-CRT | NPT (*continued*)

Nominal size		Pipe OD (mm)	Thread size	Thread type	Part number		Approvals		Max. working pressure (psi / bar)	
Inch	DN				Painted red	Galvanised	UL	FM	UL	FM
5-1/2OD x 1	125 x 25	139.7 x 33.7	1"	NPT	VK-CRT-139034NP	VK-CRT-139034NG	▪	▪	300 / 20.7	500 / 34.5
5-1/2OD x 1-1/4	125 x 32	139.7 x 42.4	1-1/4"	NPT	VK-CRT-139042NP	VK-CRT-139042NG	▪	▪	300 / 20.7	400 / 27.6
5-1/2OD x 1-1/2	125 x 40	139.7 x 48.3	1-1/2"	NPT	VK-CRT-139048NP	VK-CRT-139048NG	▪	▪	300 / 20.7	400 / 27.6
5-1/2OD x 2	125 x 50	139.7 x 60.3	2"	NPT	VK-CRT-139060NP	VK-CRT-139060NG	▪	▪	300 / 20.7	400 / 27.6
5-1/2OD x 3OD	125 x 65	139.7 x 76.1	2-1/2"	NPT	VK-CRT-139076NP	VK-CRT-139076NG	▪	▪	300 / 20.7	400 / 27.6
5-1/2OD x 3	125 x 80	139.7 x 88.9	3"	NPT	VK-CRT-139089NP	VK-CRT-139089NG	▪	▪	300 / 20.7	400 / 27.6
5 x 1	125 x 25	141.3 x 33.7	1"	NPT	VK-CRT-141034NP	VK-CRT-141034NG	▪	-	232 / 16.0	-
5 x 1-1/4	125 x 32	141.3 x 42.4	1-1/4"	NPT	VK-CRT-141042NP	VK-CRT-141042NG	▪	-	232 / 16.0	-
5 x 2	125 x 50	141.3 x 60.3	2"	NPT	VK-CRT-141060NP	VK-CRT-141060NG	▪	-	232 / 16.0	-
5 x 3OD	125 x 65	141.3 x 76.1	2-1/2"	NPT	VK-CRT-141076NP	VK-CRT-141076NG	▪	-	232 / 16.0	-
6-1/2OD x 1	150 x 25	165.1 x 33.7	1"	NPT	VK-CRT-165034NP	VK-CRT-165034NG	▪	-	300 / 20.7	-
6-1/2OD x 1-1/4	150 x 32	165.1 x 42.4	1-1/4"	NPT	VK-CRT-165042NP	VK-CRT-165042NG	▪	▪	300 / 20.7	400 / 27.6
6-1/2OD x 1-1/2	150 x 40	165.1 x 48.3	1-1/2"	NPT	VK-CRT-165048NP	VK-CRT-165048NG	▪	▪	300 / 20.7	400 / 27.6
6-1/2OD x 2	150 x 50	165.1 x 60.3	2"	NPT	VK-CRT-165060NP	VK-CRT-165060NG	▪	▪	300 / 20.7	400 / 27.6
6-1/2OD x 3OD	150 x 65	165.1 x 76.1	2-1/2"	NPT	VK-CRT-165076NP	VK-CRT-165076NG	▪	▪	300 / 20.7	400 / 27.6
6-1/2OD x 3	150 x 80	165.1 x 88.9	3"	NPT	VK-CRT-165089NP	VK-CRT-165089NG	▪	▪	300 / 20.7	400 / 27.6
6-1/2OD x 4	150 x 100	165.1 x 114.3	4"	NPT	VK-CRT-165114NP	VK-CRT-165114NG	▪	▪	300 / 20.7	400 / 27.6
6 x 1	150 x 25	168.3 x 33.7	1"	NPT	VK-CRT-168034NP	VK-CRT-168034NG	▪	▪	300 / 20.7	400 / 27.6
6 x 1-1/4	150 x 32	168.3 x 42.4	1-1/4"	NPT	VK-CRT-168042NP	VK-CRT-168042NG	▪	▪	300 / 20.7	400 / 27.6
6 x 1-1/2	150 x 40	168.3 x 48.3	1-1/2"	NPT	VK-CRT-168048NP	VK-CRT-168048NG	▪	▪	300 / 20.7	400 / 27.6
6 x 2	150 x 50	168.3 x 60.3	2"	NPT	VK-CRT-168060NP	VK-CRT-168060NG	▪	▪	300 / 20.7	400 / 27.6
6 x 3OD	150 x 65	168.3 x 76.1	2-1/2"	NPT	VK-CRT-168076NP	VK-CRT-168076NG	▪	▪	300 / 20.7	400 / 27.6
6 x 3	150 x 80	168.3 x 88.9	3"	NPT	VK-CRT-168089NP	VK-CRT-168089NG	▪	▪	300 / 20.7	400 / 27.6
6 x 4	150 x 100	168.3 x 114.3	4"	NPT	VK-CRT-168114NP	VK-CRT-168114NG	▪	▪	300 / 20.7	400 / 27.6
8 x 1	200 x 25	219.1 x 33.7	1"	NPT	VK-CRT-219034NP	VK-CRT-219034NG	▪	▪	300 / 20.7	300 / 20.7
8 x 1-1/4	200 x 32	219.1 x 42.4	1-1/4"	NPT	VK-CRT-219042NP	VK-CRT-219042NG	▪	▪	300 / 20.7	300 / 20.7
8 x 1-1/2	200 x 40	219.1 x 48.3	1-1/2"	NPT	VK-CRT-219048NP	VK-CRT-219048NG	▪	▪	300 / 20.7	300 / 20.7
8 x 2	200 x 50	219.1 x 60.3	2"	NPT	VK-CRT-219060NP	VK-CRT-219060NG	▪	▪	300 / 20.7	300 / 20.7
8 x 3OD	200 x 65	219.1 x 76.1	2-1/2"	NPT	VK-CRT-219076NP	VK-CRT-219076NG	▪	▪	300 / 20.7	300 / 20.7
8 x 3	200 x 80	219.1 x 88.9	3"	NPT	VK-CRT-219089NP	VK-CRT-219089NG	▪	▪	300 / 20.7	300 / 20.7
8 x 4	200 x 100	219.1 x 114.3	4"	NPT	VK-CRT-219114NP	VK-CRT-219114NG	▪	▪	300 / 20.7	300 / 20.7

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding. In all cases, the manufacturer's full technical documentation remains the reference document. Note that certificates, test reports and approvals may be published in the OEM name.
The contents of this publication are subject to modifications without notice. All rights reserved.
Fireking™ is a trademark of The Viking Corporation.

Viking S.A. *(ed.)* | 21, Z.I. Haneboesch | L-4562 Differdange/Niederkorn | Luxembourg | vikinglux@viking-emea.com | www.viking-emea.com

Grooved Products | Grooved Fittings | Concentric Reducer - Threaded | VK-CRT

Part numbers & technical data | VK-CRT | BSP

Nominal size		Pipe OD (mm)	Thread size	Thread type	Part number		Approvals		Max. working pressure (psi / bar)	
Inch	DN				Painted red	Galvanised	UL	FM	UL	FM
1-1/2 x 1	40 x 25	48.3 x 33.7	DN25	BSP	VK-CRT-048034BP	VK-CRT-048034BG	▪	-	232 / 16.0	-
2 x 1	50 x 25	60.3 x 33.7	DN25	BSP	VK-CRT-060034BP	VK-CRT-060034BG	▪	▪	300 / 20.7	500 / 34.5
2 x 1-1/4	50 x 32	60.3 x 42.4	DN32	BSP	VK-CRT-060042BP	VK-CRT-060042BG	▪	▪	300 / 20.7	500 / 34.5
2 x 1-1/2	50 x 40	60.3 x 48.3	DN40	BSP	VK-CRT-060048BP	VK-CRT-060048BG	▪	▪	300 / 20.7	500 / 34.5
2-1/2 x 1	65 x 25	73.0 x 33.7	DN25	BSP	VK-CRT-073034BP	VK-CRT-073034BG	▪	▪	400 / 27.6	400 / 27.6
2-1/2 x 1-1/4	65 x 32	73.0 x 42.4	DN32	BSP	VK-CRT-073042BP	VK-CRT-073042BG	▪	▪	400 / 27.6	400 / 27.6
2-1/2 x 1-1/2	65 x 40	73.0 x 48.3	DN40	BSP	VK-CRT-073048BP	VK-CRT-073048BG	▪	▪	400 / 27.6	400 / 27.6
2-1/2 x 2	65 x 50	73.0 x 60.3	DN50	BSP	VK-CRT-073060BP	VK-CRT-073060BG	▪	▪	400 / 27.6	400 / 27.6
3OD x 1	65 x 25	76.1 x 33.7	DN25	BSP	VK-CRT-076034BP	VK-CRT-076034BG	▪	▪	300 / 20.7	500 / 34.5
3OD x 1-1/4	65 x 32	76.1 x 42.4	DN32	BSP	VK-CRT-076042BP	VK-CRT-076042BG	▪	▪	300 / 20.7	500 / 34.5
3OD x 1-1/2	65 x 40	76.1 x 48.3	DN40	BSP	VK-CRT-076048BP	VK-CRT-076048BG	▪	▪	300 / 20.7	500 / 34.5
3OD x 2	65 x 50	76.1 x 60.3	DN50	BSP	VK-CRT-076060BP	VK-CRT-076060BG	▪	▪	300 / 20.7	500 / 34.5
3 x 1	80 x 25	88.9 x 33.7	DN25	BSP	VK-CRT-089034BP	VK-CRT-089034BG	▪	▪	300 / 20.7	500 / 34.5
3 x 1-1/4	80 x 32	88.9 x 42.4	DN32	BSP	VK-CRT-089042BP	VK-CRT-089042BG	▪	▪	300 / 20.7	500 / 34.5
3 x 1-1/2	80 x 40	88.9 x 48.3	DN40	BSP	VK-CRT-089048BP	VK-CRT-089048BG	▪	▪	300 / 20.7	500 / 34.5
3 x 2	80 x 50	88.9 x 60.3	DN50	BSP	VK-CRT-089060BP	VK-CRT-089060BG	▪	▪	300 / 20.7	500 / 34.5
3 x 3OD	80 x 65	88.9 x 76.1	DN65	BSP	VK-CRT-089076BP	VK-CRT-089076BG	▪	-	232 / 16.0	-
4 x 1	100 x 25	114.3 x 33.7	DN25	BSP	VK-CRT-114034BP	VK-CRT-114034BG	▪	▪	300 / 20.7	500 / 34.5
4 x 1-1/4	100 x 32	114.3 x 42.4	DN32	BSP	VK-CRT-114042BP	VK-CRT-114042BG	▪	▪	300 / 20.7	500 / 34.5
4 x 1-1/2	100 x 40	114.3 x 48.3	DN40	BSP	VK-CRT-114048BP	VK-CRT-114048BG	▪	▪	300 / 20.7	500 / 34.5
4 x 2	100 x 50	114.3 x 60.3	DN50	BSP	VK-CRT-114060BP	VK-CRT-114060BG	▪	▪	300 / 20.7	500 / 34.5
4 x 3OD	100 x 65	114.3 x 76.1	DN65	BSP	VK-CRT-114076BP	VK-CRT-114076BG	▪	▪	300 / 20.7	500 / 34.5
4 x 3	100 x 80	114.3 x 88.9	DN80	BSP	VK-CRT-114089BP	VK-CRT-114089BG	▪	▪	300 / 20.7	500 / 34.5
5-1/2OD x 1	125 x 25	139.7 x 33.7	DN25	BSP	VK-CRT-139034BP	VK-CRT-139034BG	▪	▪	300 / 20.7	500 / 34.5
5-1/2OD x 1-1/4	125 x 32	139.7 x 42.4	DN32	BSP	VK-CRT-139042BP	VK-CRT-139042BG	▪	▪	300 / 20.7	400 / 27.6
5-1/2OD x 1-1/2	125 x 40	139.7 x 48.3	DN40	BSP	VK-CRT-139048BP	VK-CRT-139048BG	▪	▪	300 / 20.7	400 / 27.6
5-1/2OD x 2	125 x 50	139.7 x 60.3	DN50	BSP	VK-CRT-139060BP	VK-CRT-139060BG	▪	▪	300 / 20.7	400 / 27.6
5-1/2OD x 3OD	125 x 65	139.7 x 76.1	DN65	BSP	VK-CRT-139076BP	VK-CRT-139076BG	▪	▪	300 / 20.7	400 / 27.6
5-1/2OD x 3	125 x 80	139.7 x 88.9	DN80	BSP	VK-CRT-139089BP	VK-CRT-139089BG	▪	▪	300 / 20.7	400 / 27.6
5 x 1	125 x 25	141.3 x 33.7	DN25	BSP	VK-CRT-141034BP	VK-CRT-141034BG	▪	-	232 / 16.0	-
5 x 1-1/4	125 x 32	141.3 x 42.4	DN32	BSP	VK-CRT-141042BP	VK-CRT-141042BG	▪	-	232 / 16.0	-
5 x 2	125 x 50	141.3 x 60.3	DN50	BSP	VK-CRT-141060BP	VK-CRT-141060BG	▪	-	232 / 16.0	-
5 x 3OD	125 x 65	141.3 x 76.1	DN65	BSP	VK-CRT-141076BP	VK-CRT-141076BG	▪	-	232 / 16.0	-
6-1/2OD x 1	150 x 25	165.1 x 33.7	DN25	BSP	VK-CRT-165034BP	VK-CRT-165034BG	▪	-	300 / 20.7	-
6-1/2OD x 1-1/4	150 x 32	165.1 x 42.4	DN32	BSP	VK-CRT-165042BP	VK-CRT-165042BG	▪	▪	300 / 20.7	400 / 27.6
6-1/2OD x 1-1/2	150 x 40	165.1 x 48.3	DN40	BSP	VK-CRT-165048BP	VK-CRT-165048BG	▪	▪	300 / 20.7	400 / 27.6
6-1/2OD x 2	150 x 50	165.1 x 60.3	DN50	BSP	VK-CRT-165060BP	VK-CRT-165060BG	▪	▪	300 / 20.7	400 / 27.6
6-1/2OD x 3OD	150 x 65	165.1 x 76.1	DN65	BSP	VK-CRT-165076BP	VK-CRT-165076BG	▪	▪	300 / 20.7	400 / 27.6
6-1/2OD x 3	150 x 80	165.1 x 88.9	DN80	BSP	VK-CRT-165089BP	VK-CRT-165089BG	▪	▪	300 / 20.7	400 / 27.6
6-1/2OD x 4	150 x 100	165.1 x 114.3	DN100	BSP	VK-CRT-165114BP	VK-CRT-165114BG	▪	▪	300 / 20.7	400 / 27.6
6 x 1	150 x 25	168.3 x 33.7	DN25	BSP	VK-CRT-168034BP	VK-CRT-168034BG	▪	▪	300 / 20.7	400 / 27.6

Table continued on next page

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding. In all cases, the manufacturer's full technical documentation remains the reference document. Note that certificates, test reports and approvals may be published in the OEM name.
The contents of this publication are subject to modifications without notice. All rights reserved.
Fireking™ is a trademark of The Viking Corporation.


Viking S.A. *(ed.)* | 21, Z.I. Haneboesch | L-4562 Differdange/Niederkorn | Luxembourg | vikinglux@viking-emea.com | www.viking-emea.com

Grooved Products | Grooved Fittings | Concentric Reducer - Threaded | VK-CRT

Part numbers & technical data | VK-CRT | BSP (*continued*)

Nominal size		Pipe OD (mm)	Thread size	Thread type	Part number		Approvals		Max. working pressure (psi / bar)	
Inch	DN				Painted red	Galvanised	UL	FM	UL	FM
6 x 1-1/4	150 x 32	168.3 x 42.4	DN32	BSP	VK-CRT-168042BP	VK-CRT-168042BG	▪	▪	300 / 20.7	400 / 27.6
6 x 1-1/2	150 x 40	168.3 x 48.3	DN40	BSP	VK-CRT-168048BP	VK-CRT-168048BG	▪	▪	300 / 20.7	400 / 27.6
6 x 2	150 x 50	168.3 x 60.3	DN50	BSP	VK-CRT-168060BP	VK-CRT-168060BG	▪	▪	300 / 20.7	400 / 27.6
6 x 3OD	150 x 65	168.3 x 76.1	DN65	BSP	VK-CRT-168076BP	VK-CRT-168076BG	▪	▪	300 / 20.7	400 / 27.6
6 x 3	150 x 80	168.3 x 88.9	DN80	BSP	VK-CRT-168089BP	VK-CRT-168089BG	▪	▪	300 / 20.7	400 / 27.6
6 x 4	150 x 100	168.3 x 114.3	DN100	BSP	VK-CRT-168114BP	VK-CRT-168114BG	▪	▪	300 / 20.7	400 / 27.6
8 x 1	200 x 25	219.1 x 33.7	DN25	BSP	VK-CRT-219034BP	VK-CRT-219034BG	▪	▪	300 / 20.7	300 / 20.7
8 x 1-1/4	200 x 32	219.1 x 42.4	DN32	BSP	VK-CRT-219042BP	VK-CRT-219042BG	▪	▪	300 / 20.7	300 / 20.7
8 x 1-1/2	200 x 40	219.1 x 48.3	DN40	BSP	VK-CRT-219048BP	VK-CRT-219048BG	▪	▪	300 / 20.7	300 / 20.7
8 x 2	200 x 50	219.1 x 60.3	DN50	BSP	VK-CRT-219060BP	VK-CRT-219060BG	▪	▪	300 / 20.7	300 / 20.7
8 x 3OD	200 x 65	219.1 x 76.1	DN65	BSP	VK-CRT-219076BP	VK-CRT-219076BG	▪	▪	300 / 20.7	300 / 20.7
8 x 3	200 x 80	219.1 x 88.9	DN80	BSP	VK-CRT-219089BP	VK-CRT-219089BG	▪	▪	300 / 20.7	300 / 20.7
8 x 4	200 x 100	219.1 x 114.3	DN100	BSP	VK-CRT-219114BP	VK-CRT-219114BG	▪	▪	300 / 20.7	300 / 20.7

Dimensional drawing

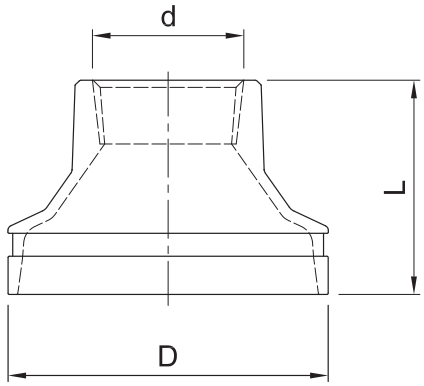

Dimensions | VK-CRT

Inch (D x d)	DN (D x d)	Pipe OD (mm)	L (mm)	Weight (kg)
1-1/2 x 1	40 x 25	48.3 x 33.7	64	0.3
2 x 1	50 x 25	60.3 x 33.7	64	0.3
2 x 1-1/4	50 x 32	60.3 x 42.4	64	0.4
2 x 1-1/2	50 x 40	60.3 x 48.3	64	0.4
2-1/2 x 1	65 x 25	73.0 x 33.7	64	0.4
2-1/2 x 1-1/4	65 x 32	73.0 x 42.4	64	0.4
2-1/2 x 1-1/2	65 x 40	73.0 x 48.3	64	0.5
2-1/2 x 2	65 x 50	73.0 x 60.3	64	0.5
3OD x 1	65 x 25	76.1 x 33.7	64	0.5
3OD x 1-1/4	65 x 32	76.1 x 42.4	64	0.5

Table continued on next page

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding. In all cases, the manufacturer's full technical documentation remains the reference document. Note that certificates, test reports and approvals may be published in the OEM name.
The contents of this publication are subject to modifications without notice. All rights reserved.
Fireking™ is a trademark of The Viking Corporation.

Trusted above all.

Viking S.A. *(ed.)* | 21, Z.I. Haneboesch | L-4562 Differdange/Niederkorn | Luxembourg | vikinglux@viking-emea.com | www.viking-emea.com

Grooved Products | Grooved Fittings | Concentric Reducer - Threaded | VK-CRT

Dimensions | VK-CRT (*continued*)

Inch (D x d)	DN (D x d)	Pipe OD (mm)	L (mm)	Weight (kg)
3OD x 1-1/2	65 x 40	76.1 x 48.3	64	0.6
3OD x 2	65 x 50	76.1 x 60.3	64	0.5
3 x 1	80 x 25	88.9 x 33.7	64	0.5
3 x 1-1/4	80 x 32	88.9 x 42.4	64	0.6
3 x 1-1/2	80 x 40	88.9 x 48.3	64	0.6
3 x 2	80 x 50	88.9 x 60.3	64	0.6
3 x 3OD	80 x 65	88.9 x 76.1	64	0.7
4 x 1	100 x 25	114.3 x 33.7	76	1.0
4 x 1-1/4	100 x 32	114.3 x 42.4	76	0.9
4 x 1-1/2	100 x 40	114.3 x 48.3	76	1.0
4 x 2	100 x 50	114.3 x 60.3	76	0.9
4 x 3OD	100 x 65	114.3 x 76.1	76	0.9
4 x 3	100 x 80	114.3 x 88.9	76	1.0
5-1/2OD x 1	125 x 25	139.7 x 33.7	89	1.1
5-1/2OD x 1-1/4	125 x 32	139.7 x 42.4	89	1.2
5-1/2OD x 1-1/2	125 x 40	139.7 x 48.3	89	1.2
5-1/2OD x 2	125 x 50	139.7 x 60.3	89	1.3
5-1/2OD x 3OD	125 x 65	139.7 x 76.1	89	1.4
5-1/2OD x 3	125 x 80	139.7 x 88.9	89	1.3
5 x 1	125 x 25	141.3 x 33.7	89	1.1
5 x 1-1/4	125 x 32	141.3 x 42.4	89	1.3
5 x 2	125 x 50	141.3 x 60.3	89	1.2
5 x 3OD	125 x 65	141.3 x 76.1	89	1.3
6-1/2OD x 1	150 x 25	165.1 x 33.7	102	1.6
6-1/2OD x 1-1/4	150 x 32	165.1 x 42.4	102	1.6
6-1/2OD x 1-1/2	150 x 40	165.1 x 48.3	102	1.9
6-1/2OD x 2	150 x 50	165.1 x 60.3	102	1.6
6-1/2OD x 3OD	150 x 65	165.1 x 76.1	102	1.7
6-1/2OD x 3	150 x 80	165.1 x 88.9	102	1.8
6-1/2OD x 4	150 x 100	165.1 x 114.3	102	3.2
6 x 1	150 x 25	168.3 x 33.7	102	1.7
6 x 1-1/4	150 x 32	168.3 x 42.4	102	2.1
6 x 1-1/2	150 x 40	168.3 x 48.3	102	2.8
6 x 2	150 x 50	168.3 x 60.3	102	1.8
6 x 3OD	150 x 65	168.3 x 76.1	102	1.7
6 x 3	150 x 80	168.3 x 88.9	102	1.8
6 x 4	150 x 100	168.3 x 114.3	102	1.9
8 x 1	200 x 25	219.1 x 33.7	102	2.9
8 x 1-1/4	200 x 32	219.1 x 42.4	102	3.0
8 x 1-1/2	200 x 40	219.1 x 48.3	102	3.0
8 x 2	200 x 50	219.1 x 60.3	127	3.8
8 x 3OD	200 x 65	219.1 x 76.1	127	3.9
8 x 3	200 x 80	219.1 x 88.9	127	3.7
8 x 4	200 x 100	219.1 x 114.3	127	3.9

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding. In all cases, the manufacturer's full technical documentation remains the reference document. Note that certificates, test reports and approvals may be published in the OEM name.
The contents of this publication are subject to modifications without notice. All rights reserved.
Fireking™ is a trademark of The Viking Corporation.

Viking S.A. *(ed.)* | 21, Z.I. Haneboesch | L-4562 Differdange/Niederkorn | Luxembourg | vikinglux@viking-emea.com | www.viking-emea.com